


AD 220

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	220,00	176,00	200,00	160,00	288,00

fP GDE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D: A Z 5J F

TRANSFER SWITCH

AD 220

Doosan
Mecc Alte
D+' &'

Manufacturer	Doosan		
Model	P086TI		
		% \$\$\$ "# "	
		% - \$\$\$ "	
		Q* + \$\$\$ < DQ	
	L	8,070	
	"	111X139	
		16,4:1	
	fl # 7	"# "	1500
	fl 7	L	15,50
		L	48,50
AbsorbedAirDischargeReSourceKey.Text	' # "	12,10	
	' # "	250,00	
	' # "	34,00	
	° C	580,00	
		24 V d.c.	
	Load	% \$i	'+) i
	# ") \$i	
		43,10	31,70 21,10

	Mecc Alte		
	ECO 38 2SN/4		
	Hz	50	
	"	200,00	
7cg'		0,80	
		3	
	fl 7	400/230	
	A	288,00	
Temperature		H	

		fl 7		fl 7	
	"	"	"	"	L
AD 220	1800,00	2688,00	1150,00	1624,00	380,00
		fl 7		fl 7	
	"	"	"	"	L
AK 50	2175	3400	1217	1938	380

AD 220

Doosan
Mecc Alte
D+ &

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-\$)

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž


ž

ž

AD 220

Doosan
Mecc Alte
D+ & T

5?) \$!

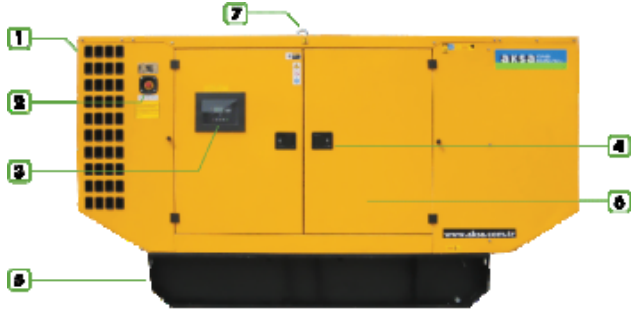

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

	"	1217
fl "L	"	3400
fl "L	"	1938
	L	380