

# AJD 90

John Deere  
Mecc Alte  
P 602



<b>ISO8528</b>	GC ; ) &
<b>SZUTEST</b>	GC - \$\$\$
<b>CE</b>	

<b>2000/14/EC</b>	&\$\$\$#( #
	z) \$ z' \$z 'D:

	"	"	"	"	Amp
400/230	90,00	72,00	80,00	64,00	116,00

	fP GDE	GC ; ) &			
	) & z	fDF DE	%&	GC " \$(*"	z&(

**Standard Specifications**

z

fl ! E

z

z

**ALTERNATOR**

fl " E

fl " ! \$ E

**TRANSFER SWITCH**

# AJD 90

John Deere  
Mecc Alte  
P 602

1

Manufacturer		John Deere		
Model		4045 T		
		% \$ \$	"# "	
		' \$ \$	"	
		000 \$ \$	< DQ	
	L	4,500		
	"	106 X127		
		17:1		
	fl # 7	"# "	1500	
	fl 7	L	13,20	
		L	32,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	6,10		
	' # "	159,00		
	' # "	13,60		
	° C	600,00		
		12 V d.c.		
	Load	% \$ \$	'+)	) \$
	# "	23,00	16,50	11,80

2

		Mecc Alte		
		ECP 34-1S/4		
	Hz	50		
	"	85,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	122,00		
Temperature		H		

3

		fl 7		fl 7	
	"	"	"	"	L
AJD 90	1120,00	2150,00	1050,00	1459,00	240,00
		fl 7		fl 7	
	"	"	"	"	L
AK 40	1470	3100	1057	1670	240



# AJD 90

John Deere  
Mecc Alte  
P 602

9B: #9  
9b[ ]bY'gdYYX"  
C]'dfYggi fY"  
7cc'UbhY'a dYfUhi fY"  
F i b' hja Y"  
6UHYfmj c'rg"  
7cbZ[ i fUVY' hja ]b[ "  
; 9B9F 5HCF  
J c' hU[ Y f@ @B' "  
7i ffYbhf@&!@ ' "  
: fYei YbVW"  
A 5-BG  
J c' hU[ Y f@ @B' "  
: fYei YbVW"  
A U]bg'fYUXn"  
A U]bg'YbUV'YX"  
; Yb"GYhfYUXn"  
; Yb"GYhYbUV'YX"

K 5F B-B;  
7\Uf[ Y Z]i fY"  
6UHYfm@ck #:[ \ ] c' hU[ Y"  
: U] 'hc' ghcd"  
@ck #:[ \ ] [ YbYfUhc'f] c' hU[ Y"  
I bXYf#j Yf[ YbYfUhc'f] fYei YbVW"  
Cj Yf# bXYf'gdYYX"  
@ck c]'dfYggi fY"  
<][ \ V'c'UbhY'a dYfUhi fY"  
G<I H8CK BG  
: U] 'hc' ghUff"  
9a Yf[ YbVW'ghcd"  
@ck c]'dfYggi fY"  
<][ \ V'c'UbhY'a dYfUhi fY"  
Cj Yf# bXYf'gdYYX"  
I bXYf#j Yf[ YbYfUhc'f] fYei YbVW"  
I bXYf#j Yf[ YbYfUhc'f] c' hU[ Y"  
C]'dfYggi fY'gYbgcf'cdYb"  
7cc'UbhY'a dYfUhi fY'gYbgcf'cdYb"  
9@97 HF =75@HF -D  
; YbYfUhc'f] YfW'ffYbH'


: 'YI J'V'Y'gYbgcf'WVb VY V'c'bfcc'YX'k ]h' h'Ya dYfUhi fYz  
dfYggi fYz dYfVW'bH[ Y f'k Ufb]b[ #]i h'Xck b# 'YVW'VW' h'f]dL  
@c'WV'gYh]b[ 'dUfUa YH'fg'UbX'a cb]h'f]b[ 'Zca 'D7 'hc  
V'c'bfcc' a cXi 'Y'k ]h' I G6 V'c'bbYVW]cb'fa Ul '\* 'a H'

9'YVW]VW' GUZYfm#9A 7 'V'a dUfV] ]hm6G'9B '\* \$-) \$  
9'YVW]VW' Vi g]bYgg'Yei ]da YbH'  
6G'9B '\*%\$!\*&9A 7 'ja a i b]mighUbXUfX"  
6G'9B '\*%\$!\*&('9A 7 'Ya ]gg]cb'ghUbXUfX"

'6UHYfmVUf[ Yf]g'a Ubi ZVW' fYX'k ]h' 'gk ]h'W]b[ !a cXY'UbX'GA 8 'YVW'bc'c[ mUbX'ih\Ug\ ] [ \ YZ]VbYVW' 6UHYfmVUf[ Yf  
a cXY'gfci hdi hJ !=VUfUWVf]gh]W]g'j YfmV'cgY'hc'gei UfY'UbX'ci hdi h]g' ] 'Ua dYfz% z' ] 'Zcf'%&j'c'hUbX'&+Z' ] 'Zcf'&(' ] "  
#bdi h% , ' !&\*('j'c'h57'"'Dfc]bY'&(\$) \Ug'Z' mci hdi hg\chVW]hdfchVW]cb'UbX'ihVWb VY i gYX'Ug'U'VW'ffYbhgci fVW"  
Dfc]bY'%&\$) #&(\$) VUf[ Yf'\Ug'\ ] [ \ YZ]VbYVW'cb[ " ]Z'Z' 'ck ZU]i fY'fUfYz' ] [ \ hk Y] [ \ hUbX' 'ck \ YUhfUX]UfYX' ]b  
UVV'cfXUbW'k ]h' ]bYUf'U'fYfbU]h'j Yg' H\Y'VUf[ Yf]g'Z'hYX'k ]h' U'dfchVW]cb X]cXY'UV'cgg'h'Y'ci hdi h'7 cbbYVWVUf[ Y'Z]  
fY'UmV'c] VYhk Yyb'dcg]h]j Y'ci hdi hUbX'7: 'ci hdi h' H\Y'mUfY'Yei ]ddYX'k ]h' F: =Z]h'f'hc'fYXi VV'Y'YVW]VW'bc]gY'fUX]UfYX  
Zca 'h'Y'XY'jVW"; Uj Ub]VW' m]gc'UfYX' ]bdi hUbX'ci hdi h]m]VW'm(\_J 'Zcf'\ ] [ \ fY' ]UV] ]h'

# AJD 90

John Deere  
Mecc Alte  
P 602

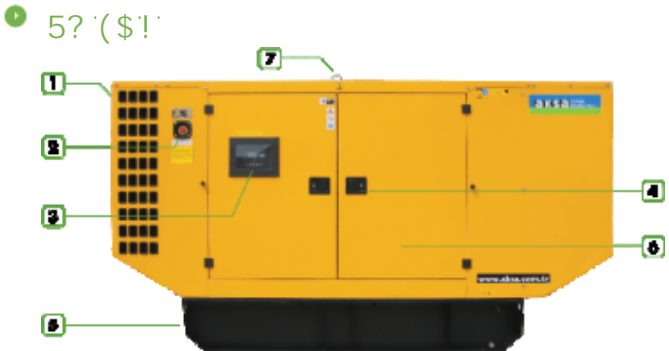

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

	"	1057
fl "L	"	3100
fl "L	"	1670
	L	240